
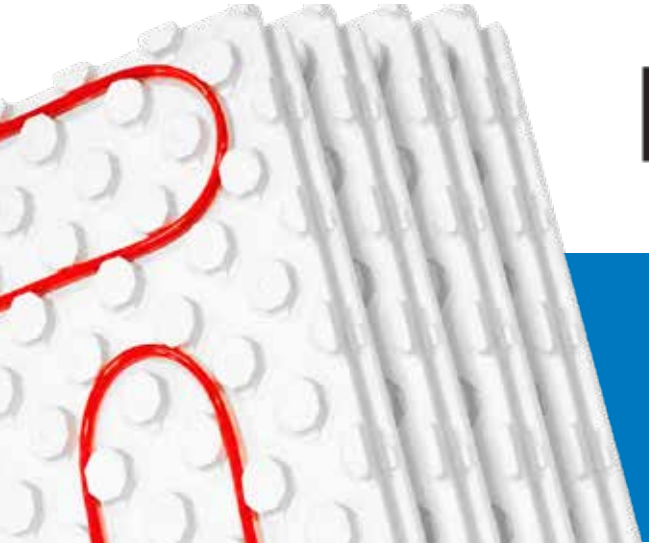


HYDROFOAM®

Hydronic Radiant Floor Insulation Board

Applications

- Under concrete slabs

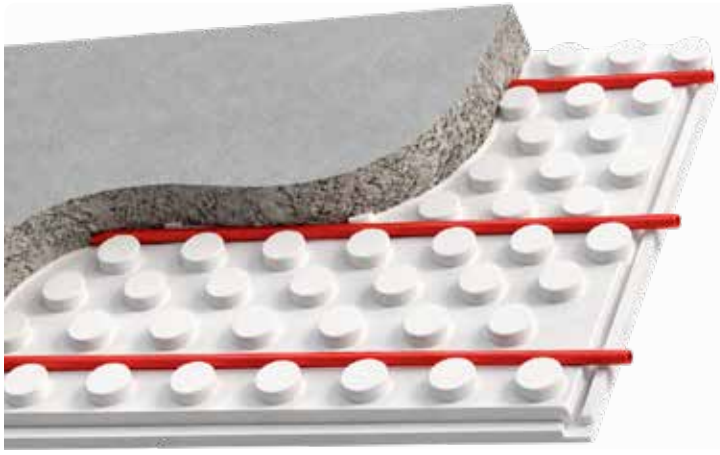

Benefits

- Under-slab insulation
- Multi-directional tubing retention
- Easy to install
- Resistant to moisture infiltration



Technical Specifications

HYDROFOAM®

Type 2 HD

Intertek

The expanded polystyrene used to manufacture HYDROFOAM® is Intertek certified (ETL Listed) in accordance with **ULC S701**

Thickness	R-Value
2 1/2"	R10.08
3"	R12.09
4"	R16.12

Available Sizes


48" x 48"

*Other sizes and densities available.

Installation Guide

1 Begin installation by ensuring the surface is level

2 Install the HYDROFOAM board and position the radiant floor heating tubing

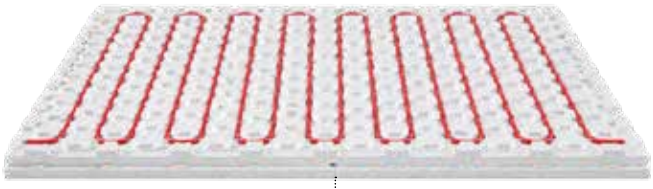

Interlocking panels for a simplified installation

3 Secure the tubing using the multi-directional anchors

4 Pour the concrete directly over the foam and tubing in accordance with local building codes